



Part number:

06VTS-30

Elevator Stage:

Manual micrometer driven

Travel range:

+ 30mm

Micrometer type:

Mitutoyo with 0.01mm marking increments

Micrometer range:

Maximum 50mm

Internal mechanics:

Precision rolling-rod bearing

Pitch and Yaw:

<50 arcsec

Platform material:

Aluminum anodized

Maximum load:

50N (in the center of the platform)

Locking mechanism:


Thumb screw on the side of the body

Preload:

Internally preloaded for backlash free motion.

Total weight:

900 grams

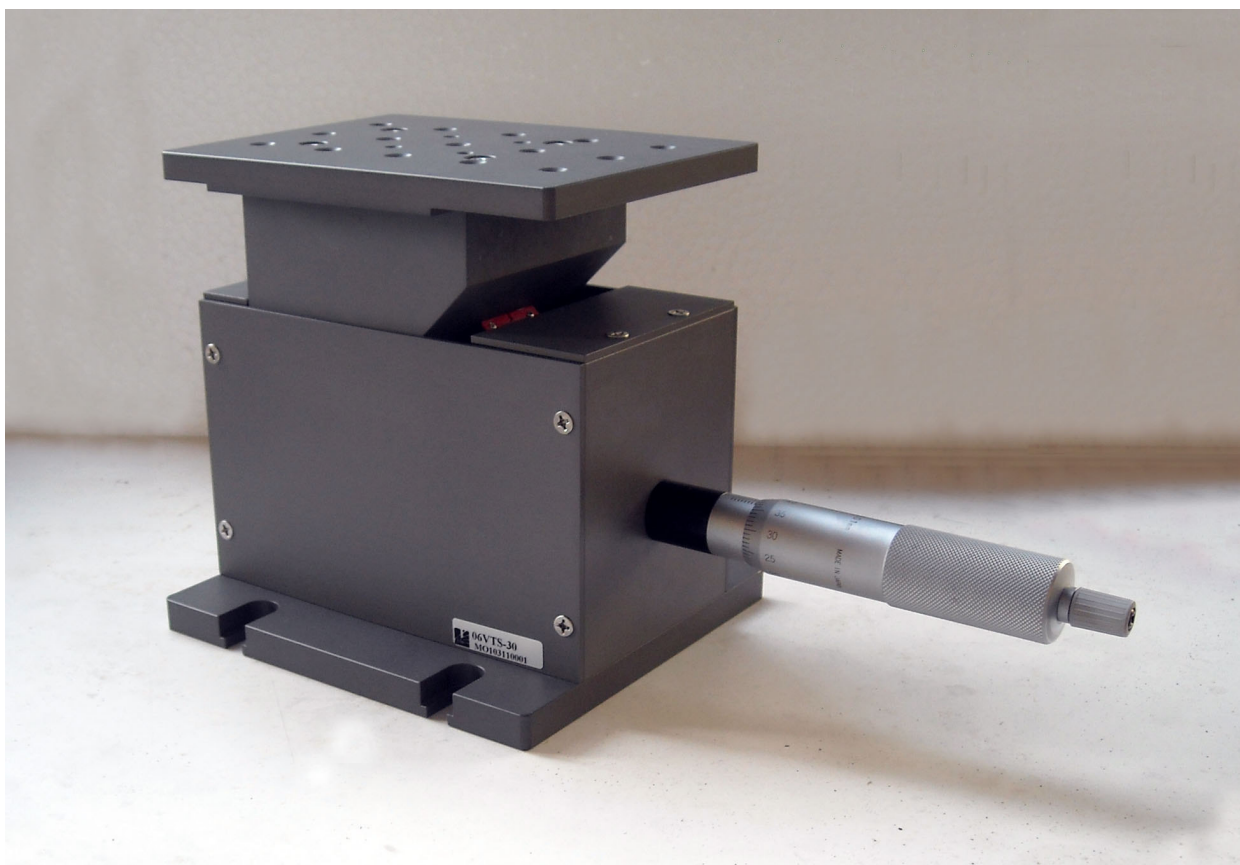

06VTS-30 photo

Technical drawing on the next page down.

