



Part number:

RSC-51E

Miniature Rotational Stage:

Travel range:

Motor type:

Position feedback:

Position repeatability:

Motor Voltages:

Motor current:

Microsteps per 360deg:

Open aperture:

Optics accepted:

Physical size:

Maximum rated speed:

Reference switch:

Recommended controller:

Motorized open aperture stage

360 degrees continuous

Ultrasonic resonance PIEZO

Optical encoder (2040, 13,056 and 52,224 increments)

10arcmin, 1.5arcmin and 25arcsec

9 -20V DC

Maximum 1500mA

Variable with speed (880 to 50,000)


10mm diameter


½ inch diameter, 5mm thick

65 x 34 x 20 mm

3,600deg/s

Hall effect

SSP-21P 

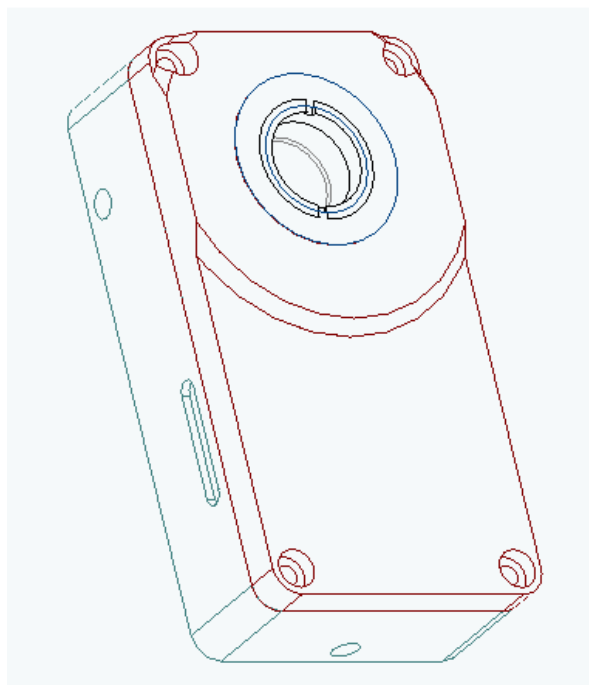

RSC-50

- The open aperture rotational stage **RSC-50** has a small size perfect for demanding industrial applications.
- Optionally the stage can be equipped with an optical encoder for direct feedback from the rotational platform

